

4.5V-60V Vin, 0.6A, High Efficiency Step-down DCDC Converter

FEATURES APPLICATIONS



REVISION HISTORY

DEVICE ORDER INFORMATION




RECOMMEN	DED OPERATING CONDITIONS		
ESD RATING	SS		
(1) (2)	•	•	
THERMAL I	NFORMATION		
			1




ELECTRICAL CHARACTERISTICS




TYPICAL CHARACTERISTICS

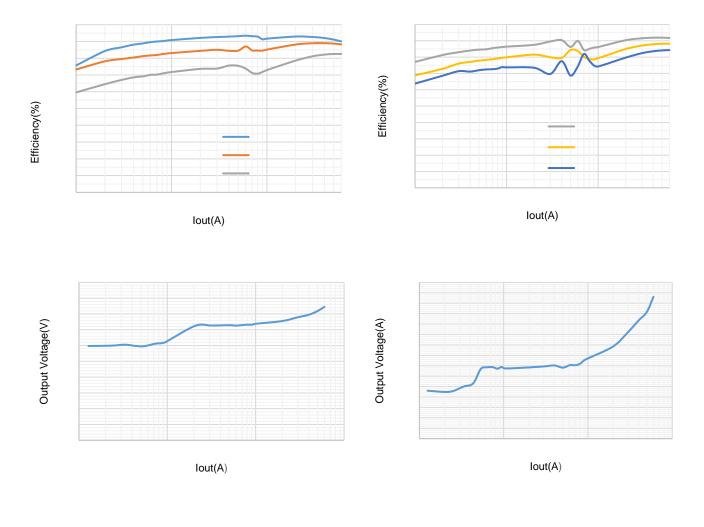





FUNCTIONAL BLOCK DIAGRAM

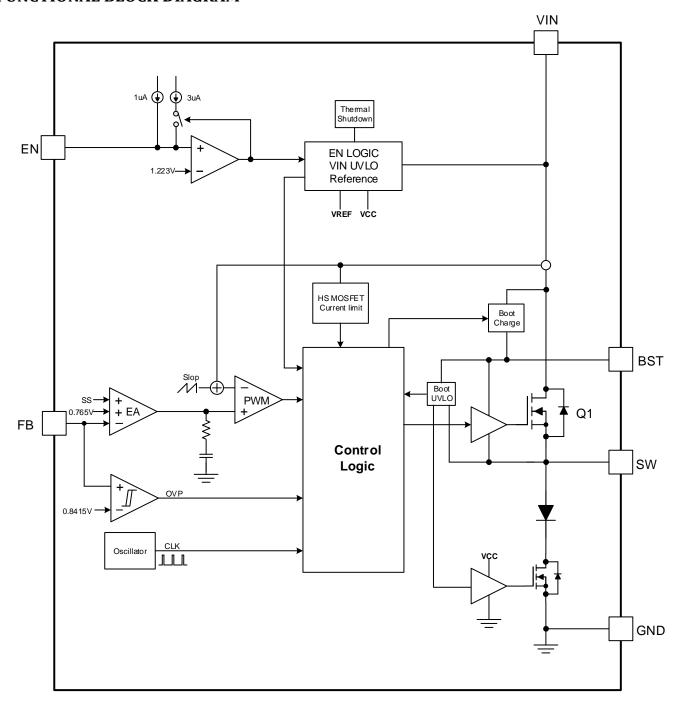



OPERATION




• •

•

±2.5

•












APPLICATION INFORMATION

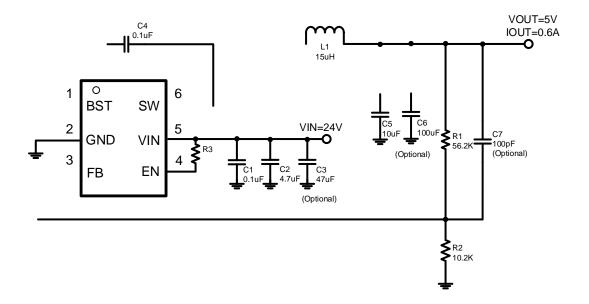

·	



_		
		
•		



•




•


•


•




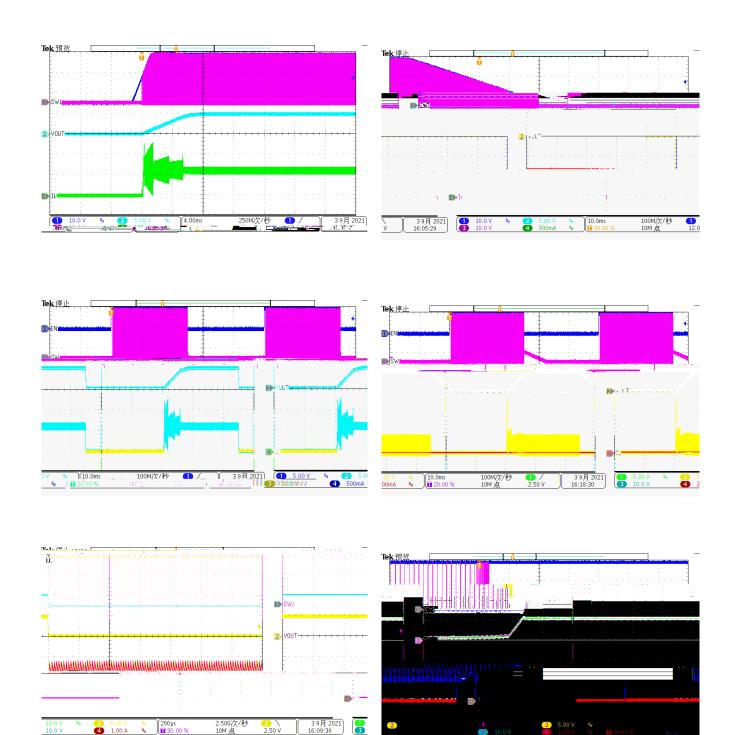














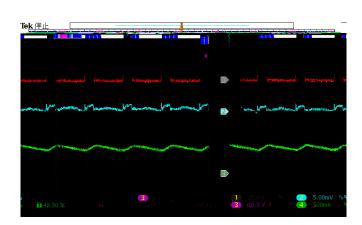





1.


2.

3.

4.

5.


6.

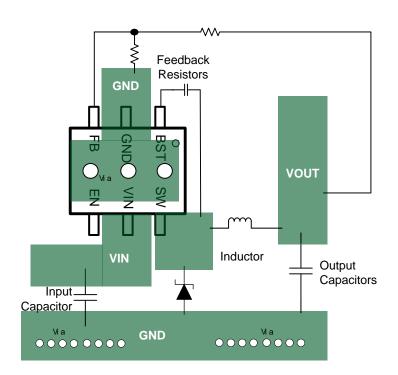







PACKAGE INFORMATION







1.

2.

3.

4. 5.

6.



TAPE AND REEL INFORMATION

